



# Assessment of Biomedical Fluid Quality Using Digital Image Processing: A Novel Approach for Medical Diagnostics

Fayik Ali A<sup>1</sup>, Absal Ahamed B<sup>2</sup>, Samhan R<sup>3</sup>, Sathish Kumar P<sup>4</sup>

<sup>1</sup>Assistant Professor, <sup>2,3,4</sup>Final Year B.E. ECE

Department of Electronics and Communication Engineering

Al-Ameen Engineering College (Autonomous)

## **Abstract**

The present study explores the application of digital image processing techniques in evaluating the quality of biomedical fluids, such as blood, urine, and cerebrospinal fluid, to enhance diagnostic accuracy in medical analysis. This research involves fluid sampling, imaging under varying conditions, and comparative analysis against standardized medical specimens. A set of reference solutions with controlled turbidity levels was prepared and validated using a nephelometer to ensure measurement precision. High-resolution images of biomedical fluids were captured under different lighting and background conditions to simulate diverse clinical environments. The study leverages MATLAB-based digital image processing techniques for fluid quality assessment, employing advanced image enhancement, segmentation, and feature extraction methods to detect anomalies in fluid composition. By integrating digital imaging with medical diagnostics, this research aims to optimize non-invasive and rapid fluid analysis, facilitating improved disease detection and patient care in clinical settings.

**Keywords:** Water, image processing, quality, MATLAB software, specimens, sampling

## 1. INTRODUCTION

People started to pay more focus to the ecosystem and preserve the environment as the economic system developed and people's living standards rose. Water, as a life force, has attracted a lot of people's attention. It is extremely significant among all of the leadership, water quality checks, and the appropriate steps against water contamination. Monitoring is much more essential for cloudiness. Many investigations have been reported by scholars in the field of study, and the results have been positive. Turbidity is a measure of water clarity that synthetically represents all types of contaminants in the water, such as sludge, bacteria, inorganic salts, and so on [1]. Machine vision technology is based on the development of digital images, which are processed using a number of methods and image data is retrieved from the gathered digital images. The information that corresponds to our actual requirement



identifies data (like speeding up the picture of the licenceplate license number, implying the present value in the pictures of the tool, and so on) in order to transform image data into the factual data that we require [2]. A convolutional neural network is characterised by the use of a technology to perform various activities in favor of the human brain's output. Unfortunately, there are few fully automated vision-based methods for water pollution identification in the literature that use imaging techniques and a mixture of more than one organic creature. We will present a graphical system that addresses this problem in the following message. It's intended to be a self-contained camera-based groundwater quality inspection system. Our technique has 2 biological organisms that are sensitive to toxins to provide good water quality check results. [4] The first is Lemna minor, an underwater plant with up to 3 leaves on every root. Lemna's main colour is bright green in pristine water without any toxicity, however this colour changes to white and yellow in the presence of toxins. Lemna has a weak immune system to harmful compounds and has a slow reaction time when they are present in a water vessel. The other species has been a well Daphnia magna, a type of water flea. Since its discovery in 1934, Daphnia has been employed extensively in a variety of research. It is a living organism that, like Lemna, has a poor resistance to poisonous compounds but responds quickly to their existence in a tank filled. This distinction is one of the key reasons why the reactions of these 2 organisms to harmful chemicals are coupled to identify a potential potable water concern.

Because machine vision technology takes use of robots to substitute human beings' requirement to experience before even being able to distinguish, it should be classified as advanced systems [5-7]. Neural networks are important in pattern recognition. The diverse patterns in the image recognition system frequently have some regularity characteristics, but these conceptual rules are not linear in most circumstances, thus it is necessary to make a relationship between the model features and classes using a neural network.

CAFOs generate a large volume of wastewater. Reusing cleaned animal manure for barn maintenance and watering can assist incorporate management of water resources substantially [8]. Animal treated wastewater in most CAFOs is confined to open ponds, which are subject to frequent changes in water purity and water retaining capacity. The effluent can contain



extra nutrients that are harmful to soil organic growth, as well as chemical pollutants, salts, and viruses that are hazardous to the ecosystem or population health [9]. These dangers can be reduced by closely monitoring if the ponds have provided adequate treatment and whether the sewage has satisfied the crop fields' fertiliser requirements. However, due to a lack of connectivity between CAFOs and water labs, traditional monitoring methods are unable to offer accurate lagoon water data to enable exact wastewater recycling. As a result, finding a low-cost and efficient lagoon water quality monitoring technology has become a pressing concern. Although there were efforts to improve lagoon monitoring program, these technologies have some expense and generalisability disadvantages. For example,[10] developed an independent water surveillance and testing system that depends on responding automated driving and complicated electrical signal process control to analyse water chemical variables. presented an IoT water tracking system that can monitor water status in real time. The surveillance cost of this system, however, was relatively significant, making the technology ineffective.

[11]created a water purification system using a chemical gas sensor and a virtual instrument approach. However, not only does this system rely on the sample's purity, but the measuring process itself is time demanding.

Image processing has been a prominent analytical tool that has been used in a variety of fields[12]. It has the potential to significantly lower both lab test and labour expenses. [13]. Recent improvements have shown that image processing approaches may be used to evaluate and assess bacteria in wastewater, forecast inflation events, and precisely place floccs[14]. Remote sensing has employed RGB colour coordinates to detect and forecast soil and geologic elements in sparsely vegetated areas. [15],

developed an RGB value sewage monitoring system based on a digital image produced from a specific point of true colour image. The American Dye Manufacturers' Institute 3 and 31 wavelength approaches can efficiently measure sewage for true colour and apparent colour as a tristimulus filter by utilising a spectrometer as the measuring system.

## 2. DESIGN



## 2.1 Mechanical Design

Two manufacturing cameras are linked to a computer using the Matlab programming environment as well as the Image Collection and Computer Vision Toolbox to provide a technological solution for visual examination. The basic concept behind water quality testing is to fill 2 distinct containers with the same water . place Lemna minor for one vessel and Daphnia magna in the other. Figure 2 shows our experimental workspace, which was set up for a machine vision activity. The first vessel, as previously said, includes any Lemna minor organism that is obviously green and develops broad in a top if water quality are ideal in terms of toxicity. When low-purity water is present, the Lemna minor's hue and surface deteriorate drastically. In a few hours, the Lemna's colour changes rapidly to yellow or white, although its surface changes relatively minimally. The second application of Daphnia magna was very identical to the first. The only distinction is that Daphnia's life is determined not by its colour or surface, but by the speed with which individual animals move. Simply put, more Daphnia activity means clearer water. Other image processing techniques should be utilised to estimate the current viability of Daphnia species, according to the findings.

The two manufacturing cameras placed above the containers in our design monitor both the Daphnia's and the Lemna's vessels. After a predetermined amount of time has passed, both containers are scanned again. Each image is promptly processed, and the findings are combined with the previous iterations' findings. The only two characteristics retrieved from the photos of the Lemna organism are the clarity of green colour and the general surface of green colour. In the instance of Daphnia magna, a technique of detecting overall present movement of the present fleas is based on a discrepancy between two photographs in a sequence.



**Fig. 3. The color CCD cameras captured a series of two pictures: Lemna minor (on the left) and Daphnia magna (on the right).**


Despite its simplicity, this strategy is surprisingly effective for robust image acquisition devices. B. Image Obtaining Obtaining photos of both species in the vessels is the first stage in the inspection assignment. Two identical Imaging Source Ltd. commercial USB webcams with a size of 1280 by 960 pixels were utilised to achieve this. A manual illumination mode was chosen as a suitable method due to the regular and reliable sequence of obtained images [6]. In the case of Lemna, the exhibition time is directly set to 1/20 s for the first image and 1/30 s for the second image. Finally, due to consistent acquisition, the cameras' automated white balancing feature has been disabled. Image segmentation in both the Lemna minor and Daphnia magna examples is very simple, requiring only basic image processing techniques with straightforward execution [10, 11]. The photographs of Lemna are processed using a technique based on colour data in visual information [9], whereas the pictures of Daphnia are handled as a series of dynamical pictures and mutual movement is recognised using a differential approach.

## **2.2. Image Processing And Classification**


The Pictures of Lemna Minor Have Been Processed The photographs captured by a camera mounted on top of the container with the Lemna species are in typical Rgb image. Almost all colour commercial cameras have a native format that isn't exactly what we need for the



colour analysis that follows. The RGB colour space is converted to an alternate colour space called as a YCbCr in order to accomplish exact and reliable colour research and examination. These 2 colour spaces are virtually identical, with the exception that the Y element of grey levels is expressly specified in the YCbCr format. The conversion from RGB to YCbCr is clear and may be repeated without losing data accuracy. We employed a basic method for categorization of each component of a source images in the instance of Lemna's hue and surface characteristic. The luminance component Y was removed, and an actual set of photos was used to create a prediction algorithm of a healthy Lemna species in the residual CbCr plane. Figure 1 shows an example picture of a normal Lemna species and a corresponding prediction method in the CbCr plane.

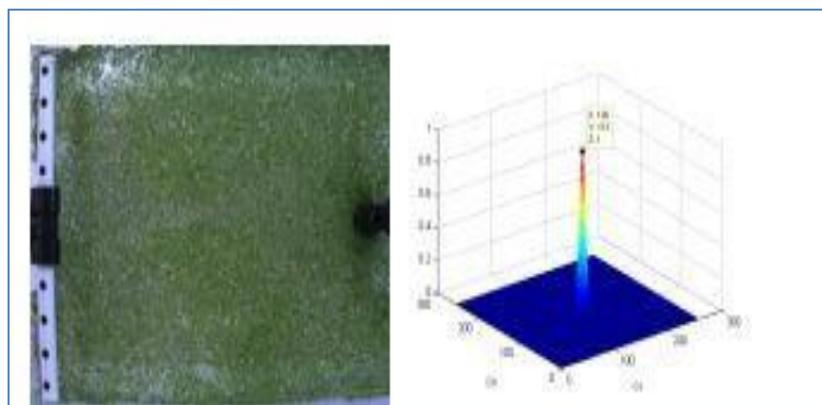

**Fig. 1. A healthy Lemna organism and the bayesian classification algorithm (on the left)**

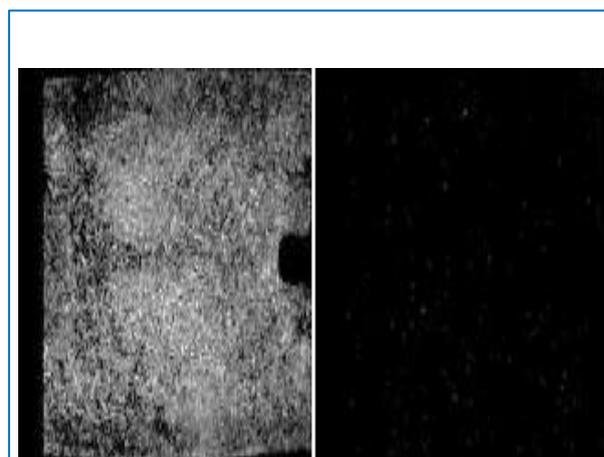




**Fig 2: Images of the probability model: probabilistic maps of green and yellow colours on the left and right, respectively. Each combination of input pixel values Cb and Cr receives a clear response from the model.**


This response calculates the probability that a given pixel corresponds to the bright green class. A position in the Lemna class is also associated with this chance. Because the normal Lemna organism was completely green, only the green band of the input image is used in the classification problem. The unhealthy is the inverse of the healthy. The colour of the Lemna organism degrades, notably towards white and yellow, and the Cr component enters the classification phase. As a result, not only is the previously mentioned stochastic map associated to the G generated. The same method is used to create a map connected to the RG, and both images are eventually integrated into a single synoptic image.

As seen in Fig. 2, the probability map associated with the green colour merely reflects how healthy Lemna's species is. The probability map associated with the yellow colour, on the other hand, expresses how hazardous the same creature is. These two classifications, however, do not complement each other. In the colour space, there is a huge gap (called neutral) between the hues of the unhealthy and healthy Lemna. The lack of the Lemna organism or a colour of Lemna other than green or yellow causes the black patches in Fig. 6. The total area of all green items in an image is the single representative characteristic for determining quality of the water as the final step.

The surface of a healthy Lemna was expressed as an integer, which is equivalent to the total of all rgb components within a specific ROI in an image. A graph with a rising, declining, or stable trend is created by a succession of these integers corresponding to successive iterations. The Lemna organism's comparative fitness is then calculated as a proportion of the last and initial samples in the graph.

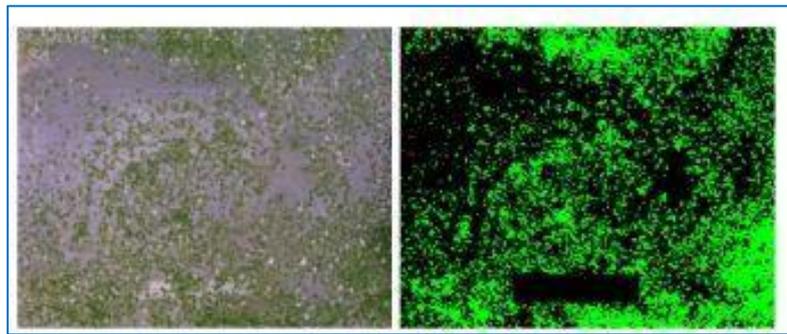

**Fig. 3. An example of Lemna's input image with the segmented healthy (G) and unwell (R) items.**

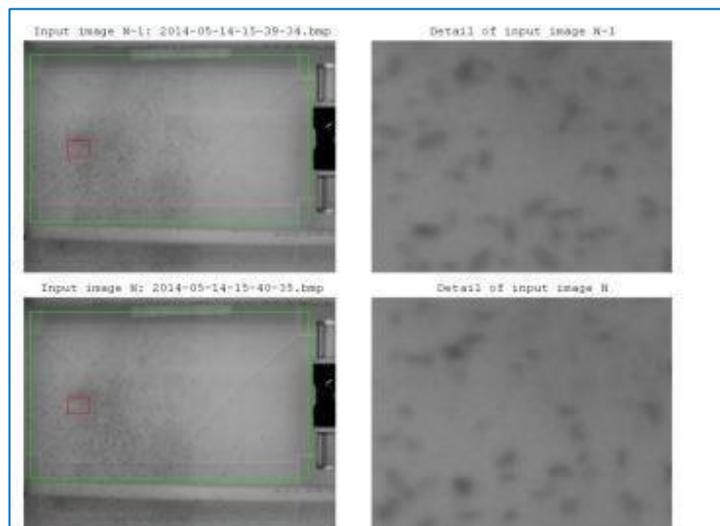

**Fig. 4. In the left column, there are a couple of input photographs, and in the right column, there are highlighted details (red rectangles).**

From an ecotoxicology standpoint, this fitness feature is closely related to the investigated water cleanliness. Image Analysis of Daphnia Magna A technique for processing photographs of the Daphnia magna is totally different from the color-based method for analyzing images of Lemna minor, as discussed in one of the earlier chapters. Only an exact measure of present mobility activity is required for the purpose of water quality monitoring.

A continuous series of Daphnia organism pictures is obtained and then used as an initial data




for image processing techniques. For the identification of present motion activities of Daphnia microorganisms, a so-called differential imaging approach was used. In general, a current picture is deducted from a model, which is also known as a backdrop model. The differential image is created as a result of the subtraction, with bright pixels corresponding to spots in the current source images where values have altered against the models. In the literature, there are numerous methods for determining the model picture.

Following multiple tests, we've chosen to employ a simple reduction of the sequence's two successive photos. If the current picture  $I_N(x,y)$  has an index of  $N$ , the model will be the picture  $I_{N-1}(x,y)$  with an index of  $N-1$ . Because the length traversed by healthy Daphnia creatures between 2 subsequent photos is much more than their average duration, this method can be used. It means that healthy organisms can move enough in the contrast image to be seen. Figure 4 shows examples of two sequential photos with their matching features.

Because we don't wish to recognise individual organisms, it's obvious that subtracting the two sequential photos can be beneficial for estimating current activity. In such circumstances, a different method for determining the background must be employed. The equation expresses the chosen approach for computing the divergent image  $D_N(x,y)$  mathematically (1).

$$D_N(x,y) = |I_{N-1}(x,y) - I_N(x,y)| \quad (1)$$

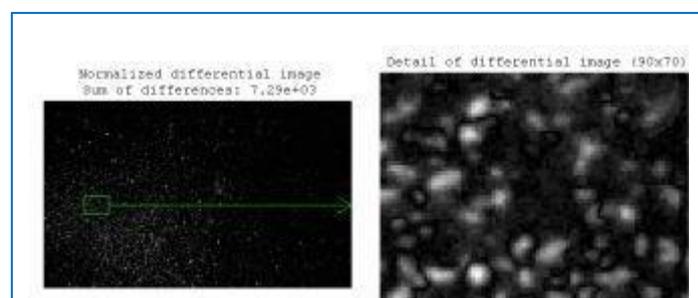

**Fig. 5. On the left, a normalised differential image, and on the right, a markedly enhanced detail.**




Because the orientation of the organisms' motion is not significant in this assignment, the resultant image numbers of the divergent picture are handled in absolute value, as shown by the the equation. The divergent image was only visible in its normalised form in Fig. 8, but it is used for all calculations in its quasi original state. As previously stated, pixels with high intensity value in the DN(x,y) represent places with large movement, and photons with low intensity value represent static areas with no movement.

The thresholding procedure must be performed in order to obtain a binary image because the generated differential picture is yet a continuous signal with a large number of luminance. The excessive current image DN(x,y) is thresholded with the threshold level of to produce this binary mapping of present disparities. The conventional formula, written here as the equation, then yields the binary map BN(x,y) (2). In each cycle, the criterion of given by formula (3) is adaptively chosen based on the largest value in the present divergent image. During the whole picture series analysis, a continuous sensitivity degree of the thresholding process is maintained.

$$B_N(x, y) = \begin{cases} 0 & |I_{N-1}(x, y) - I_N(x, y)| < \varepsilon \\ 1 & |I_{N-1}(x, y) - I_N(x, y)| \geq \varepsilon \end{cases} \quad (2)$$

$$\varepsilon = f[\max(D_N(x, y))] \quad (3)$$

In Fig. 6, all of the stages of the image analysis approach explained thus far are clearly displayed. The two input pictures IN and IN-1 are in the first row, the relevant differentiated image DN and its normalised form is in the second row, and the binary mapper BN and the first control signal IN with the underlined differences is in the third row. In the final step of categorization, a scalar value derived from the total of all single variations is merely one indicator for assessing water quality depending on Daphnia organism motion.

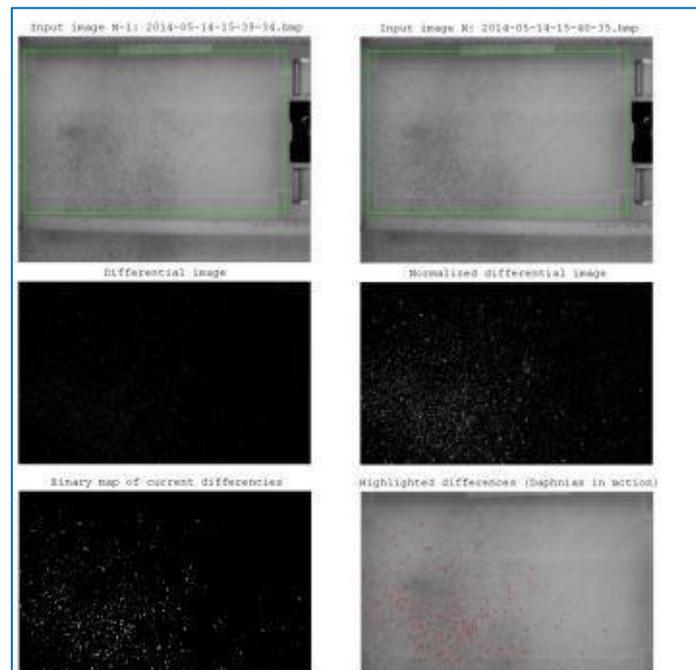

**Fig. 6. The binary image BN and marked moving creatures in the original image in the bottom column, the simple divergent image DN and the normalised differential picture in the middle row, and the 2 input images IN and IN-1 in the top row.**


As a result, relative engagement levels will inevitably fluctuate more than intended. Furthermore, because the Daphnias' motion is partially unpredictable and unstable, we're interested in tracking relative movement over a longer time. Its waveform must be filtered to prevent the relative activity's shifting shape. Because it allows for easy filtration along the temporal axis, the rolling average method was chosen as a convenient way to achieve this.

$$RA_f(i) = \frac{RA(i) + RA(i-1) + \dots + RA(i-M+1)}{M} \quad (4)$$

where RA(i) represents the value of an initial relative action in the i-th iteration, RAF(i) represents the value of a filtering relative action in the i-th iteration, and M is the width of the rolling average filter. In Fig. 10, the raw numbers of relative activity as well as the filtered data by the rolling average oscillations are shown. An alarm relating to filthy water will occur if the present value of the observed relative action is less than this defined limit. Figure 11 shows two examples of evaluating a whole gallery throughout the course of two days of



measurement.

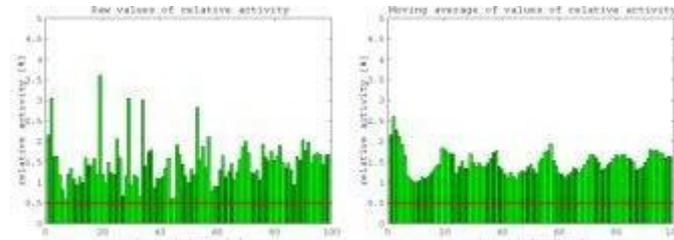

**Fig. 7. On the left, the raw comparative activity levels waveform, and on the right, the same sine wave processed by a moving mean filter with a width of  $M = 5$ .**

Both the image capture duration and the breadth of the moving mean filter were set in these two trials.


### 3. RESULTS

Because these distinct monitoring sections are handled as independent measurements in independent vessels, the findings of the Lemna and Daphnia organisms' procedures have the identical weight and significance for a target application. As a result, if merely one result exceeds the given limit, a global alarm will be triggered. We ran a number of experiments in the open assessment galleries, as well as some strict checks in each of the three possible galleries. Because a similar trend was detected in both situations when the liquid in both vessels was contaminated throughout our studies, the results appear to be excellent. In the instance of Daphnia monitoring, the method outlined takes only absolute differences in luminance between two photos into account.

Noncontextual fragmentation is the name given to this type of image processing operation. In the event of contextual separation, a far more complicated approach for computing or estimating the vessel's reference image will be calculated or projected. As a result, the



procedures we employed to assess water unfitness are quite easy and quick to execute. Unfortunately, as previously stated, a non-contextual technique for Daphnia organism motion sensors is extremely limited for future demand and will almost certainly be supplanted by some sort of contextual feature extraction with other features capable of monitoring individual items independently.

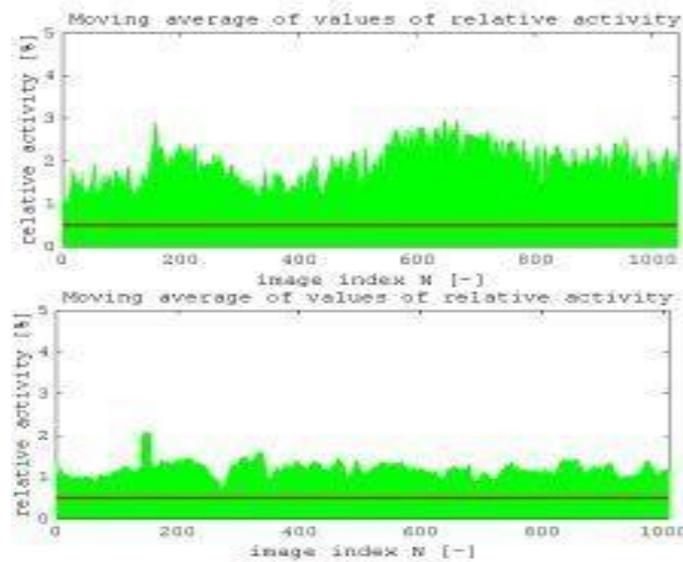

**Fig. 8. The two waveforms correspond to two entire one-day galleries filtered by 2 distinct width moving mean filters.**

#### 4. CONCLUSIONS

1. Turbidity in water is caused by suspended particles such as clay, silt, finely split chemical and biochemical debris, and soluble pigmented organic compounds.
2. The results of the experiment are influenced by a number of parameters, including image pixel resolution, lighting conditions, backdrop, and noise level.
3. Image scaling, image entry and export, and MATLAB programming all have an impact on image representation.



4. In trial 1, the average scores of all gathered photographs were determined. The classifiers we developed in this study have an accuracy of up to 74.75 percent.
5. In trial 2, we received the low and high averages values. The classifiers we got in this investigation had a reliability of up to 71.25 percent.
6. In trial one, the accuracy obtained was greater than in trial two.

## REFERENCES

- [1] Misaghi, Farhad, et al. "Introducing a water quality index for assessing water for irrigation purposes: A case study of the Ghezel Ozan River." *Science of the Total Environment* 589 (2017): 107-116.
- [2] Zeinalzadeh, Kamran, and Elnaz Rezaei. "Determining spatial and temporal changes of surface water quality using principal component analysis." *Journal of Hydrology: Regional Studies* 13 (2017): 1-10.
- [3] Taoufik, Gasmi, ImenKhouni, and Ahmed Ghrabi. "Assessment of physico-chemical and microbiological surface water quality using multivariate statistical techniques: a case study of the Wadi El-Bey River, Tunisia." *Arabian Journal of Geosciences* 10.7 (2017): 1-19.
- [4] Şener, Şehnaz, Erhan Şener, and AyşenDavraz. "Evaluation of water quality using water quality index (WQI) method and GIS in Aksu River (SW-Turkey)." *Science of the Total Environment* 584 (2017): 131-144.
- [5] Mathew O.C., Rahman A.M.J.Z." A novel energy optimization mechanism needed for medical data transmission using honeycomb routing" *Journal of Medical Imaging and Health Informatics* (2016).
- [6] Bora, Minakshi, and Dulal C. Goswami. "Water quality assessment in terms of water quality index (WQI): case study of the Kolong River, Assam, India." *Applied Water Science* 7.6 (2017): 3125-3135.
- [7] Zhang, Yinan, et al. "A water quality management strategy for regionally protected



water through health risk assessment and spatial distribution of heavy metal pollution in 3 marine reserves." *Science of the Total Environment* 599 (2017): 721-731.

[8] Wang, Jie, et al. "Multivariate statistical evaluation of dissolved trace elements and a water quality assessment in the middle reaches of Huaihe River, Anhui, China." *Science of the total environment* 583 (2017): 421-431.

[9] Zhao, Yan-ping, et al. "Improvement of water quality in the Pearl River Estuary, China: a long-term (2008–2017) case study of temporal-spatial variation, source identification and ecological risk of heavy metals in surface water of Guangzhou." *Environmental Science and Pollution Research* 27.17 (2020): 21084-21097.

[10] Levêque, Jonas G., and Robert C. Burns. "A Structural Equation Modeling approach to water quality perceptions." *Journal of environmental management* 197 (2017): 440-447.

[11] Adu-Manu, Kofi Sarpong, et al. "Water quality monitoring using wireless sensor networks: Current trends and future research directions." *ACM Transactions on Sensor Networks (TOSN)* 13.1 (2017): 1-41.

[12] Tripathi, Mansi, and Sunil Kumar Singal. "Use of principal component analysis for parameter selection for development of a novel water quality index: a case study of river Ganga India." *Ecological Indicators* 96 (2019): 430-436.

[13] Wu, Jianhong, and Jun Lu. "Spatial scale effects of landscape metrics on stream water quality and their seasonal changes." *Water Research* 191 (2021): 116811.

[14] Murphy, Rebecca R., et al. "A generalized additive model approach to evaluating water quality: Chesapeake Bay case study." *Environmental modelling & software* 118 (2019): 1-13.

[15] Teta, Roberta, et al. "Cyanobacteria as indicators of water quality in Campania coasts, Italy: a monitoring strategy combining remote/proximal sensing and in situ data." *Environmental Research Letters* 12.2 (2017): 024001.

[16] Batur, Ersan, and DeryaMaktav. "Assessment of surface water quality by using satellite images fusion based on PCA method in the Lake Gala, Turkey." *IEEE Transactions on Geoscience and Remote Sensing* 57.5 (2018): 2983-2989.

[17] Prabakaran K., Vengataasalam S., Balaji G. "Numerical analysis of state space



---

systems using single term Haar wavelet series” *Applied Mathematical Sciences* (2014).